


Floor gully with bottom outlet, of plastic with low profile and high capacity.

Removable water trap

- Grating, dimension Ø 150 mm.
- Outlet, dimension Ø 50, 75 or 110 mm.

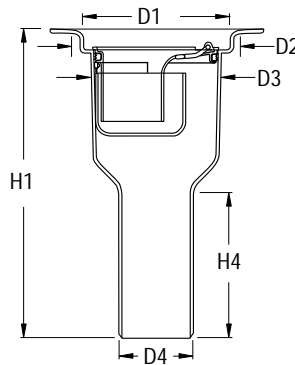

Dimensions in mm

Art. number	D1	D2	D3	D4	H1	H4
711 39 27	150	173	132	50	230	58
711 39 29	150	173	132	75	180	54
711 39 25	150	173	132	75	320	150
711 39 30	150	173	132	75	286	150
711 39 28	150	173	132	110	180	66

Art. number	Description	Outlet mm	Capacity	Material
711 39 27	BRAGE 50, with blue clamp.ring, round grating in plastic	50	2,0 litres/sec	ABS-plastic
711 39 29	BRAGE 75 KM, with blue clamp.ring, round grating in plastic	75	3,0 litres/sec	Polyeten
711 39 25	BRAGE 75, with blue clamp.ring, round grating in plastic	75	3,0 litres/sec	ABS-plastic
711 39 30	BRAGE 75 PP, with blue clamp.ring, round grating in plastic	75	3,0 litres/sec	Polypropen
711 39 28	BRAGE 110, with blue clamp.ring, round grating in plastic	110	3,0 litres/sec	Polyeten

N.B. When connecting the sealing layer to the floor, follow instructions from the supplier of the flooring.

PURUS BRAGE for vinyl floor is supplied with:

- Removable water trap RAN (of plastic)
- Automatic adjusting clamping ring - KL 150 blue
- Grating of plastic, snapped into place - P 150
- Protective cover
- Installation instructions

When installing in brick floor, change the round grating into the PURUS Brick frame. Several models are available.

Other types of flooring:

- Concrete floor – use grating RSK 713 83 41
- Plaster floor – use PM ring RSK 713 38 95

System asseciores[®]

	Art number
NOOD water trap of plastic with odour-stop and back flow preventer	713 84 20
NOOD water trap of stainless steel with odour-stop and back flow preventer	713 84 33
Water trap RAN of plastic	711 80 82
Water trap RAN of stainless steel	711 80 84
Water trap CENTER of stainless steel	711 81 09
Airtight inner seal	713 84 18
Foam stop for connection to washing machine, laundry sink etc.	711 37 62

Other accessories

Yellow clamping ring for sealing layer	See chapt. 5
Extension ring	See chapt. 5
Brick frame	See chapt. 5
PURUS plate (for install. in beam supported wooden floors).	See chapt. 5
Gratings of stainless steel	See chapt. 5
PURUS Support	See chapt. 5
Plate flange-/kit	See chapt. 5
PM ring	See chapt. 5
Locking device for grating(plastic/stainless)	See chapt. 5



Our ongoing product development may entail changes in version, design and construction, and we reserve the right to make such changes.



PURUS floor gullies are approved acc. to the European standard floor gullies, EN 1253. Approved to be installed in all types of wet areas.